



**WEBER  
ENTEC**

**REDUCED  
SLUDGE  
INCREASED  
GAS YIELD  
IMPROVED  
DEWATERING  
IMPROVED  
CO<sub>2</sub> FOOTPRINT**


**DesiUS  
AT WWTPs**



**Flow-through cell BioPush:**  
The BioPush is the core technology of the DesiUS. This new generation ultrasound provides long lifetime, zero maintenance and operational reliability.

## WEBER ENTEC - THE COMPANY

Weber Entec GmbH & Co. KG is a subsidiary of Weber Ultrasonics AG, one of the global leaders in ultrasonic components. The main focus of Weber Entec is the turnkey design and construction of ultrasound based applications in environment technology, especially ultrasonic treatment of biogenic materials also known as disintegration. Because of its broad range of expertise, the company is a one-stop source for manufacturing, plant construction, sales, system analysis and process optimisation.

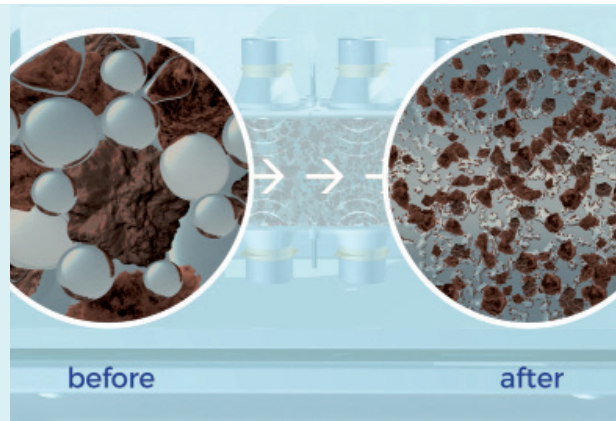


Effect of cavitation implosion  
on the sludge

## INNOVATIVE ENVIRONMENTAL TECHNOLOGY

The use of ultrasonic disintegration leads to significant cost reduction within water treatment plants of all kinds. A new generation of ultrasound technology is made available with the DesiUS (Disintegration Ultrasound System) – internationally recognized and approved.

Due to its robust and specific design, the DesiUS has advantages over its competitors due to its reliability, cost and energy efficiency. The increased gas yield and sludge reduction contribute significantly to the improvement of the CO<sub>2</sub>- and energy efficiency balance on WWTPs.

# TECHNOLOGY

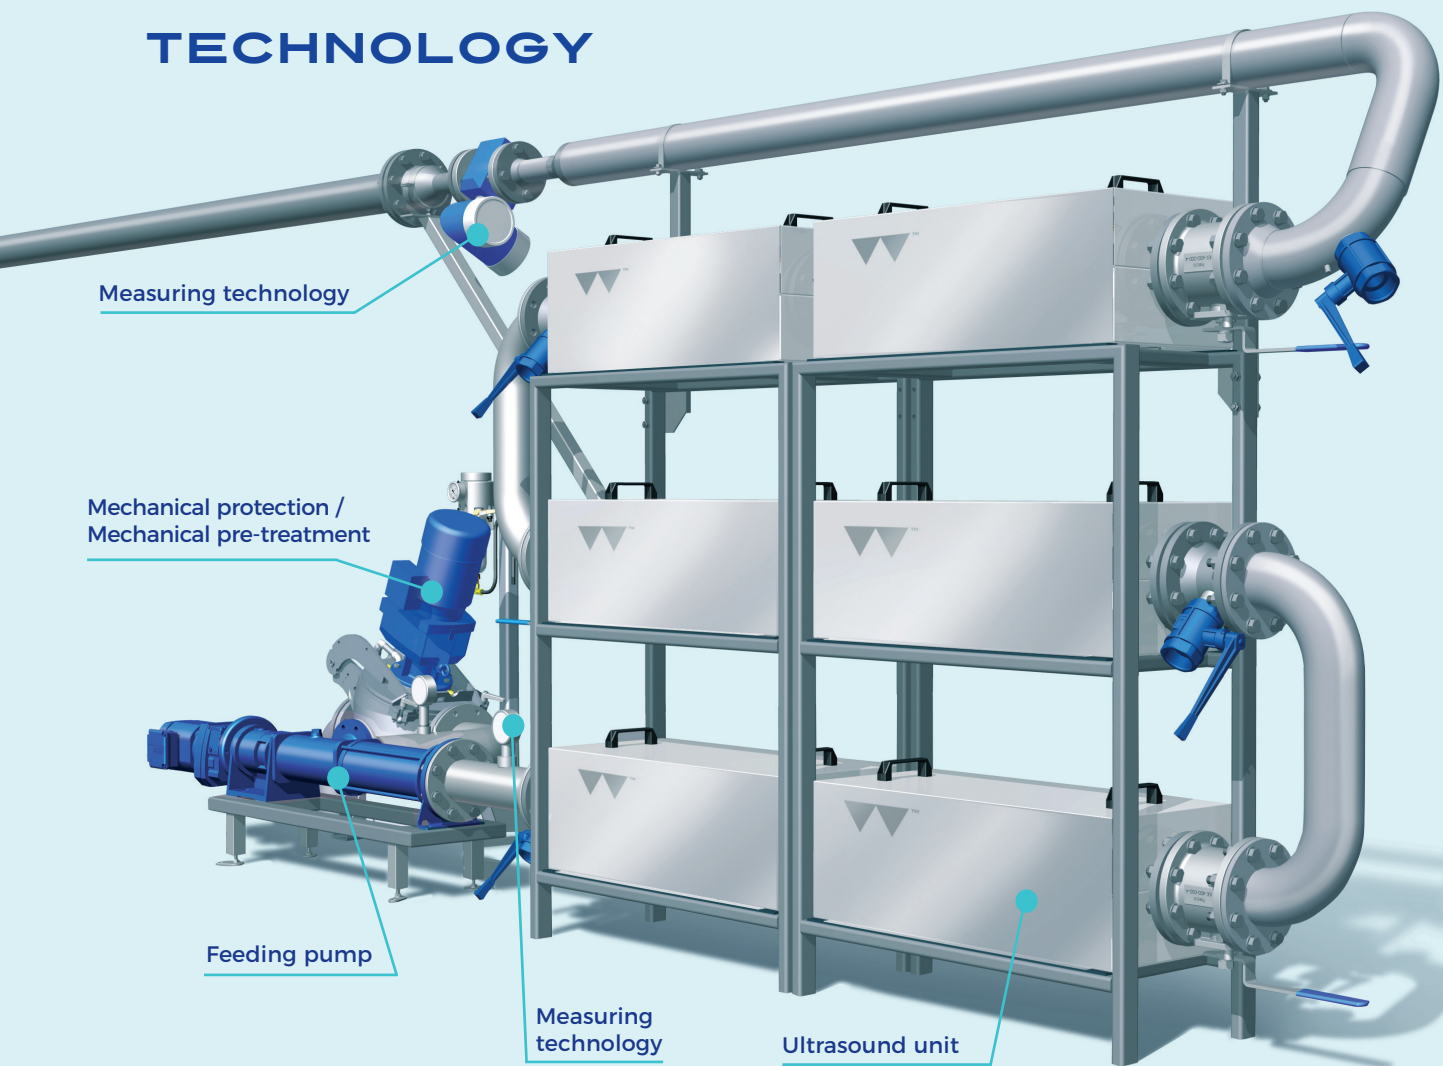

## DesiUS - HIGH STANDARDS IN EFFICIENCY AND DURABILITY

Focus of the R&D for the DesiUS has been the requirement to achieve the highest possible ultrasonic cavitation performance along with the highest machine reliability. The core technology of the DesiUS is the BioPush flow-through cell, which due to its high-performance surface converter generates a homogeneous cavitation field within the reactor. The energy efficiency and the impact on the sludge is significantly higher than with traditional ultrasound technology. On top of this the BioPush is, due to its design, 100 % maintenance free.

Thus problematic substrates, such as highly thickened mixed sludge of municipal water treatment plants can be treated efficiently. A macerator is installed upstream of the turnkey plant. Its main purpose is to protect the machine from hazardous particles. Via a progressive cavity pump the sludge is fed through the sound field with controlled speed to adjust the required specific energy. A PLC control system along with all necessary sensors for process control and supervision provides user-friendly, robust and trouble-free operation.

### TECHNOLOGY ADVANTAGES

- ▶ Very high efficiency - 50 % and more savings compared to other disintegration systems
- ▶ Very low-maintenance (required only for pump and macerator)
- ▶ High degree of operational reliability
- ▶ Optimized adaption towards the specific requirements
- ▶ Low space requirement through small and compact construction
- ▶ Easy installation through plug & play
- ▶ Quick pay back
- ▶ Clogging free
- ▶ Continuous process
- ▶ Treatment of substrates up to 15 % DM possible



# BALANCE EXAMPLE FOR A WWTP WITH APPROX. 200.000 POPULATION EQUIVALENTS

▶ Reduction of disposal costs 1.168 t through 8 % less sludge to dispose	<b>71.000 Euro per year</b>
▶ Additional electrical energy gain 368.200 kWh through 12 % higher gas yield	<b>58.000 Euro per year</b>
▶ Additional thermic energy gain 667.000 kWh through 12 % higher gas yield	<b>40.000 Euro per year</b>
▶ Reduction of polymer costs 1,2 t polymers at 5 % savings	<b>3.449 Euro per year</b>
▶ Energy consumption of the DesiUS approx. 12 kW	<b>21.000 Euro per year</b>
▶ Energy for nitrogen back load 45.000 kWh	<b>6.800 Euro per year</b>
▶ Maintenance costs (max.)	<b>6.000 Euro per year</b>




**Potential savings  
per year**


**139.000 €**

# INCREASED YIELD AND REDUCED COSTS WITH ULTRASONIC DISINTEGRATION

With ultrasound disintegration, the continuous implosions of countless microscopic steam bubbles destroy with their respective shear forces the biological cells. This increases the substrate surface and boosts the enzymatic activity in the digester. Consequence is an increased degradation acceleration, which leads to an increased biogas yield. Also the sludge viscosity will be decreased significantly as well as the dewatering capability of the sludge will be improved. The ultrasound technology can be individually adjusted to the respective sludge properties and leads to significant cost savings on WWTPs.

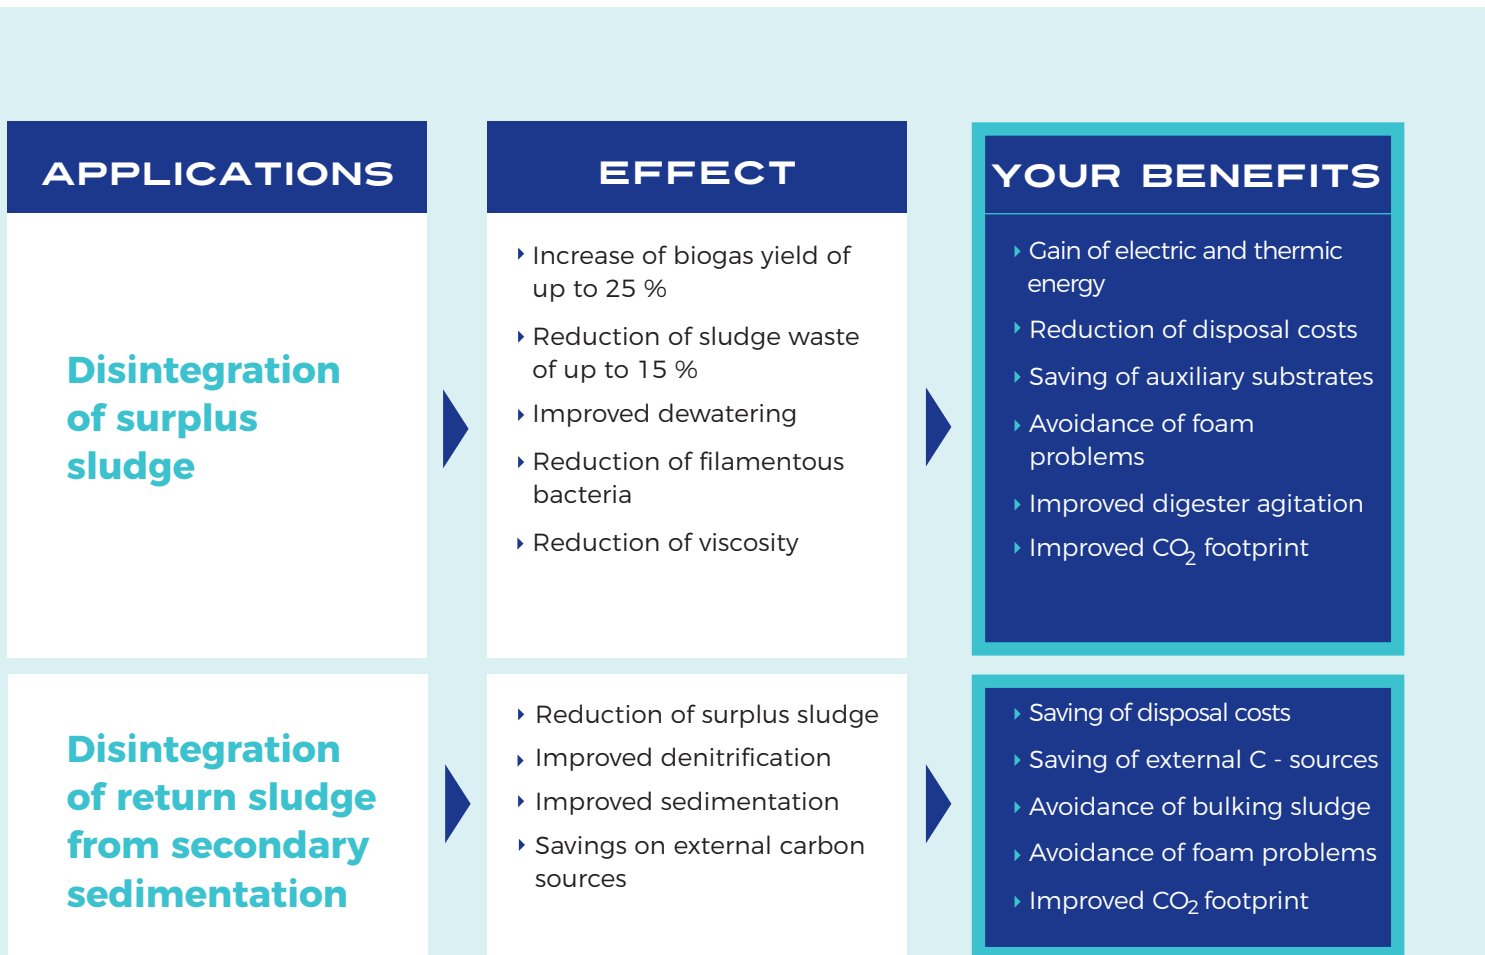

The problem of the fiber bacteria *Microthrix parvicella*, the typical root cause of foam and bulking sludge, is significantly reduced through ultrasonic treatment.

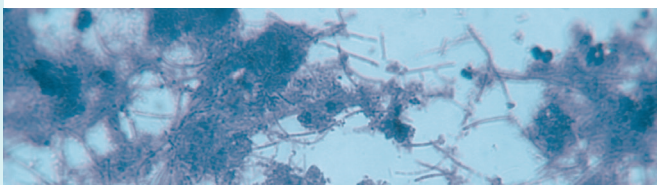


before



after

# POSSIBLE INTEGRATION

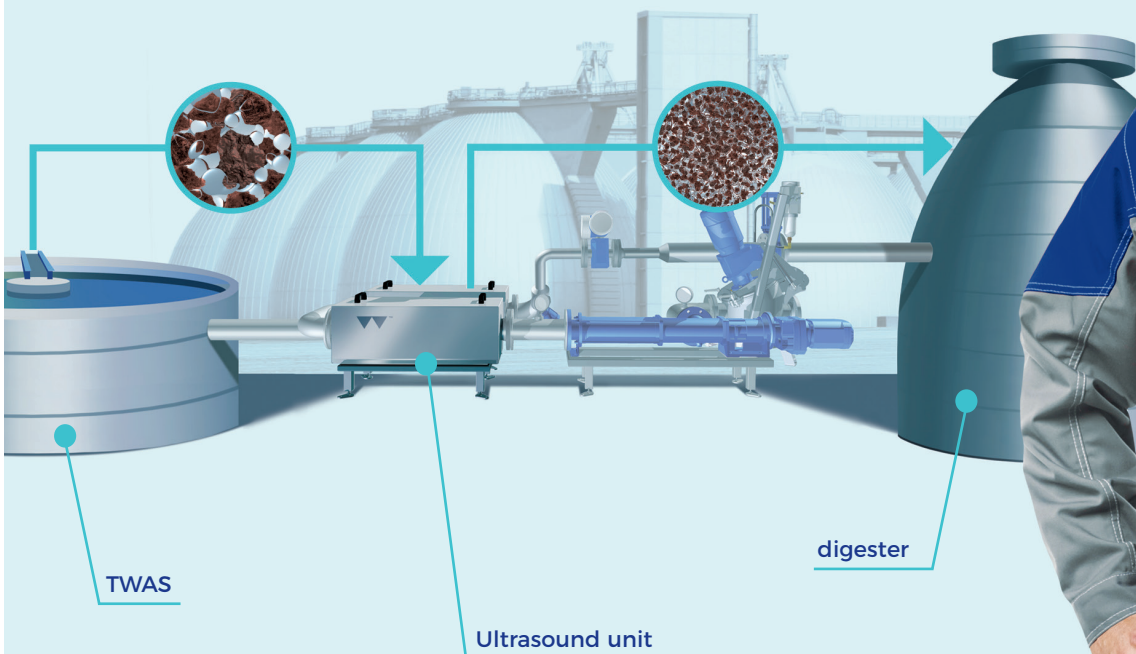

## SERVICE

- ▶ System analysis to verify potential of cost reduction in sewage sludge operations
- ▶ System analysis to determine the use of sludge disintegration to fight bulking sludge
- ▶ System analysis to identify potential
- ▶ Mass balances
- ▶ Planning, manufacturing, installation and commissioning of a customised disintegration system
- ▶ Measurement and process technology support while transition into continuous operation
- ▶ Process optimisation while transitioning
- ▶ Quotation and implementation as a turnkey solution – no hidden costs
- ▶ Leasing models available
- ▶ Personal, competent and non-binding advice at any time



**WEBER  
ENTEC**

Weber Entec GmbH & Co. KG  
Im Ermlisgrund 10  
76337 Waldbronn  
Germany

Phone +49 (0) 72 43/ 72 88 980  
Fax +49 (0) 72 43/ 76 55 011  
mail@weber-entec.com  
www.weber-entec.com



More info?  
Scan here for the video